



# Category B Packaging and Labelling

## (IATA Packing Instruction 650)

### DIAGRAM OF CATEGORY B PACKAGE

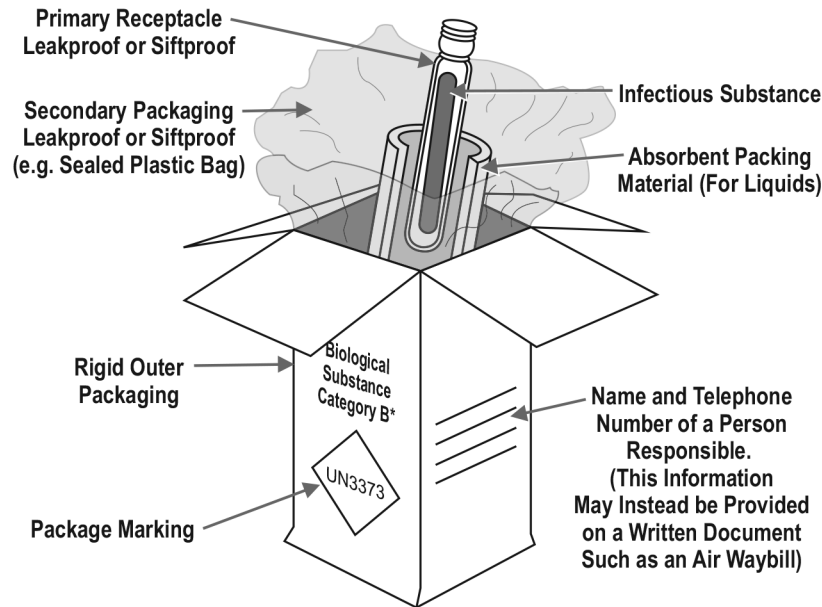

### CROSS SECTION OF CLOSED PACKAGE

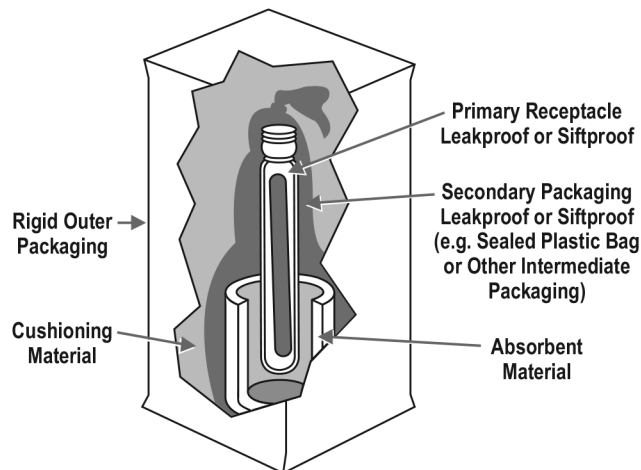

**Notes:** At least one surface of the outer packaging must have a minimum dimension of 100 mm x 100 mm (3.9 inches). For liquid shipments by aircraft, the primary receptacle or the secondary packaging must be capable of withstanding without leakage an internal pressure producing a pressure differential of not less than 95 kPa. If multiple fragile primary receptacles are placed in a single secondary packaging, they must be either individually wrapped or separated to prevent contact. Follow the package manufacturer's closure instructions.